



Lens for Prism Optics Based SWIR Line Scan Camera


These lens series are developed specially for prism optics based SWIR line scan camera and correspond to the resolution of pixel size 25 μm and the image size of 15mm. As a line up, 20mm, 24mm, 28mm, 35mm, 50mm and 105mm are available.



Specifications

Model	BV-L1020-SWIR	BV-L1024-SWIR	BV-L1028-SWIR	BV-L1035-SWIR	BV-L1050-SWIR	BV-L1105-SWIR
Image size	15 mm					
Flange back	46.5 mm (in air)					
Focal length	f=20 mm	f=24 mm	f=28 mm	f=35 mm	f=50 mm	f=105mm
Iris range	F2.8 to F22					
MOD	0.3m (from the front of lens)					
Angle of view	35.79° (Image height:7.5 mm, WD 2m)	31.94° (Image height :7.5 mm, WD 2m)	27.61° (Image height :7.5 mm, WD 2m)	23.11° (Image height :7.5 mm, WD 2m)	16.04° (Image height :7.5 mm, WD 2m)	7.92° (Image height :7.5 mm, WD 2m)
Wavelength	900nm ~ 1800nm					
Exit pupil	-348.54mm (From image focus point, WD 2m)	-391.68mm (From image focus point, WD 2m)	-435.7mm (From image focus point, WD 2m)	-416.14mm (From image focus point, WD 2m)	-300.0mm (From image focus point, WD 2m)	-186.69mm (From image focus point, WD 2m)
Pixel Size	Applicable pixel size :25 μm					
Filter dia.	82mm/P0.75	67mm/P0.75	72mm/P0.75	62mm/P0.75	52mm/P0.75	72mm/P0.75
Mount	M52 mount					
Weight	660 g	530 g	550 g	530 g	340 g	1010 g

Spectral Response

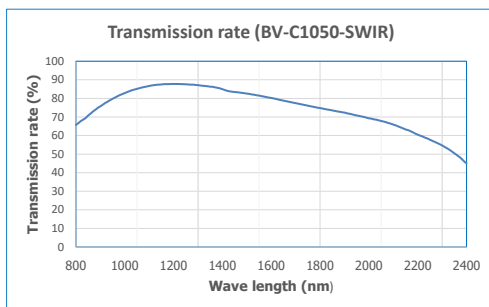

Close up lens



No.10 (Focal length 100mm)
Filter diameter: 52mm
Spectral response: 800nm to 2500nm

No. 5 (Focal length: 200mm)
Filter diameter: 52mm

Transmission rate: 95% or more
: Note: Conversion ring from 52mm to 72mm is available.

BV Lens series — C mount lens

C mount type in BV lens series is converted from current BV M52 mount lens series to C mount using conversion lens and there are two types according to their applications.



Photo is BV-L1050-SWIR-C

BV-L1020-SWIR-C series



This lens series is C mount type for single sensor type SWIR cameras. Lineup is 6 types including 20mm, 24mm, 28mm, 35mm, 50mm and 105mm.

Image size: 15mm

Iris range: F2.8 to F22

Wavelength band width: 900nm ~ 1800nm

Applicable camera: BV-C2900-CL, BV-C2900-GE, BV-C2905-CL, BV-C2905-GE, BV-C3100C

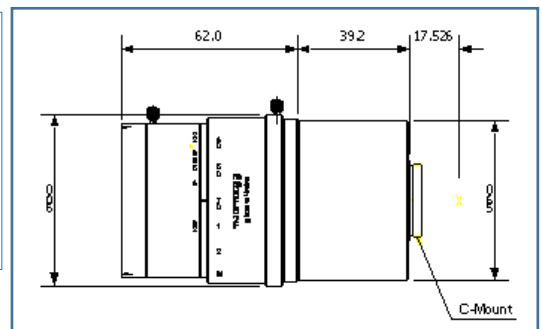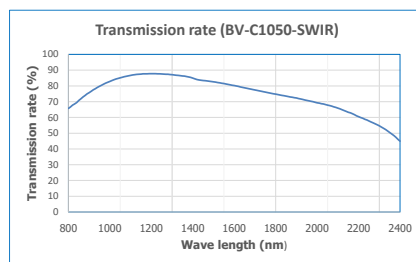

BV-C1050-SWIR-C Dimensions



Photo is BV-L1050-C

BV-L1020-C series

This series is designed for 1/3-inch or 1/2-inch 2CCD/3CCD C Mount camera and has 6 types of lens, 20mm, 24mm, 28mm, 35mm, 50mm and 105mm.


Image size: 4.8mm (H) for 1/3-inch 2CCD/3CCD camera

6.4mm (H) for 1/2-inch 2CCD/3CCD camera

Iris range: F2.8 ~ F22

Wave length range: 400nm ~ 900nm

Applicable camera: 1/2-inch, 1/3-inch 2CCD or 3CCD C mount Camera

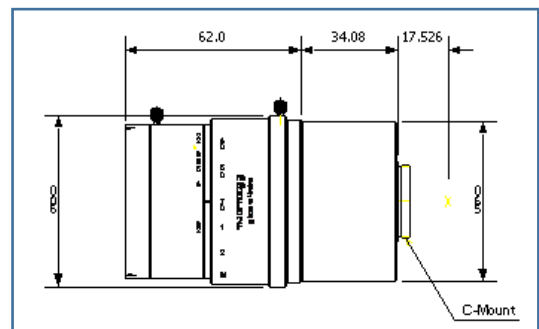

BV-C1050-C Dimensions

* Specifications are subject to change without prior notice

Bluevision Ltd., Japan

1-13-12 Shin-Yokohama, Yokohama, Kanagawa 222-0033, Japan

TEL: +81-45-471-4595/FAX: +81-45-471-4598

URL: <http://www.bluevision.jp> / E-mail: sales@bluevision.jp